

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number  
**WO 2004/008688 A1**

- (51) International Patent Classification<sup>7</sup>: **H04L 12/18**, H04N 7/15
- (21) International Application Number: PCT/IB2003/003016
- (22) International Filing Date: 9 July 2003 (09.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0216240.2 12 July 2002 (12.07.2002) GB
- (71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **PAILA, Toni** [FI/FI]; Luoteispolku 10, FIN-10160 Degerby (FI). **VAINIO, Miia** [FI/FI]; Jamerantaival 10 F 94, FIN-02150 Espoo (FI). **HAKULINEN, Harri** [FI/FI]; Kutteritie 1, FIN-33950 Pirkkala (FI).
- (74) Agents: **DERRY, Paul et al.**; Venner, Shipley & Co., 20 Little Britain, London EC1A 7DH (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ANNOUNCING INFORMATION SERVICE THROUGH BROADCASTING OR MULTICASTING

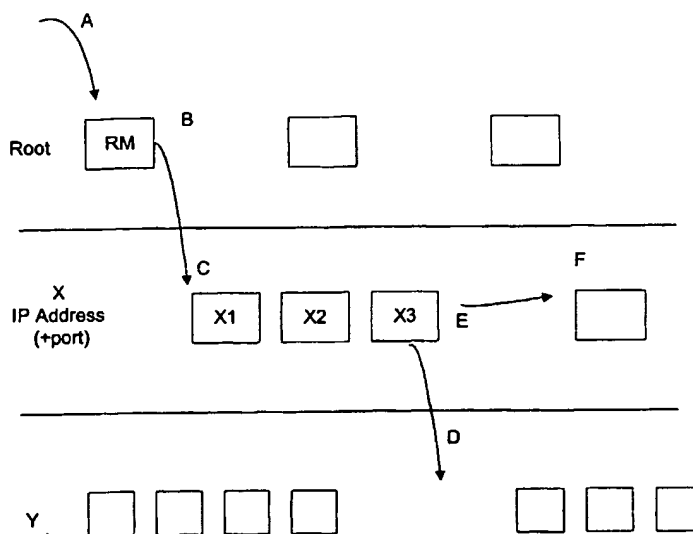

(57) Abstract: A receiver (Figure 2), receives IP session announcement signals from a terrestrial digital video broadcasting system. Each IP session announcement (RM) includes information concerning announcements on an immediately lower level as well as information identifying the quantity of announcement data, such as the number of announcement messages, and a timeout value. The quantity data tells the receiver how many messages X1 to X3 it needs to receive (C) before it has received all the relevant announcement messages. The timeout value informs the receiver how long it can wait before again receiving the messages X1 to X3 (which may have changed in content by then). After initially receiving the messages X1 to X3, the receiver may sleep (E), or it may receive announcement messages from another channel Y (D).

10/521 110

15 Rec'd PCT/PTG 11 JAN 2005

ANNOUNCING INFORMATION SERVICE THROUGH BROADCASTING  
OR MULTICASTING

**Field of the Invention**

This invention relates to a method of operating broadcast or multicast apparatus, to  
5 an information service broadcaster or multicaster, to a method of operating a  
receiver, to a receiver and to a user interface. The invention has application in, but  
is not limited to, Internet Protocol session announcements in terrestrial digital video  
broadcasting.

10 **Background of the Invention**

An Internet protocol (IP) service can include plural items delivered using an IP  
session. An IP session may include an IP stream carrying primary content, such as  
live or recorded music, and further IP streams carrying secondary content, such as  
error correction or song lyrics. Another example of an IP session is news, where a  
15 primary IP stream may carry audio data, with secondary streams carrying a video  
clip download and a web page push respectively. Such services can be broadcast  
using terrestrial digital video broadcast (DVB-T), but IP streams may instead be  
multicast or unicast.

20 A DVB transmission system usually provides a data rate of 10 Mbps or more. This  
provides a possibility to significantly reduce the average DVB receiver power  
consumption by using time-slicing, which is based on time division multiplexing  
(TDM). Time sliced data is sent in bursts using significantly higher bandwidth than  
the bandwidth required if the data was transmitted using static bandwidth. Within a  
25 burst, data is included indicating the time to the beginning of the next burst (delta-  
t). Between the bursts, service data is not transmitted, allowing other services to use  
the bandwidth. This enables a receiver to stay active for only a proportion of the  
time, whilst still receiving bursts of data for a requested service. If the mobile  
handheld terminal requires a lower constant bitrate, buffering the received bursts  
30 can provide this. Data is formatted by using, for example, a multi-protocol  
encapsulator in accordance with Section 7 of European Standard EN 301 192  
"Digital Video Broadcasting (DVB); DVB specification for data broadcasting." The  
multi-protocol encapsulator sends encapsulated data to a digital broadcast

transmitter for broadcast to the digital broadcast receiver as a time-sliced signal. The time-sliced signal comprises a continuous series of transmission bursts.

A DVB-T receiver terminal is able to determine information about IP sessions from IP session announcements. Announcements are structured in a hierarchal manner. At the lowest level, announcements in respect of a subcategory of information services may include a number of messages, each message having information describing the IP session, information descriptive of the content of the IP streams, information concerning the location (e.g. channel frequency, etc.) of the respective IP streams, information about schedules of sessions, and certain other parameters related to it. Above the lowest level, there are hierarchical levels of announcements, each level of which gives information only about announcements on an immediately lower level. The services typically are divided into different categories such that the highest (or root) level may include messages relating one-to-one to the categories of news, sport, entertainment, etc. Announcements in the sport category may then consist of messages each relating to a different one of football, hockey, athletics, etc. There may be any number of levels of announcement. An IP session announcement can be made using a session description protocol (SDP) message, which forms part of a session announcement protocol (SAP) message.

20

It is common for an IP session announcement at one level in the hierarchy to be transmitted on a channel having a different frequency to a channel on which an IP session announcement on a lower level, for example an immediately lower level, is transmitted. This means that it is not usually possible for a terminal having a single radio receiver to receive announcements on different levels simultaneously.

25

### Summary of the Invention

According to a first aspect of the invention, there is provided a method of operating broadcast or multicast apparatus, the method comprising: controlling the apparatus to broadcast or multicast, in respect of one or more announcements on a lower level and relating to a category of an information service, data indicating a category to which the announcements relate, and data indicating the quantity of announcement information transmitted in respect of the lower level.

30

According to a second aspect of the invention, there is provided an information service broadcaster or multicaster arranged to produce for broadcasting or multicasting data indicating a category to which one or more announcements on a lower level and relating to information service belong and data indicating the quantity of announcement information transmitted in respect of the lower level announcements.

According to a third aspect of the invention, there is provided a method of operating a receiver, the method comprising: receiving via a receiver announcement data indicating a category to which one or more announcements on a lower level and relating to an information service belong, and quantity data indicating the quantity of announcement information transmitted in respect of the lower level announcements; and controlling the receiver to receive announcement data for a period of time dependent at least in part on the quantity data.

According to a fourth aspect of the invention, there is provided a receiver for receiving announcement data indicating a category to which one or more announcements on a lower layer and relating to an information service belong and quantity data indicating the quantity of announcement information transmitted in respect of the lower level announcements; and arranged to receive announcement data for a period of time dependent at least in part on the quantity data.

According to a fifth aspect of the invention, there is provided a user interface, useable with an electronic program or service guide, the user interface comprising: a receiver module arranged to receive data indicating a category to which one or more announcements on a lower level and relating to an information service belong, and quantity data indicating the quantity of announcement information transmitted in respect of the lower level announcements, and a display module arranged to display a number of category options, which options are selectable by a user, the number of category options being dependent at least in part on the quantity data.

Advantages which may ensue from the inclusion of the quantity information are generally experienced at the receiver end. In particular, knowing how long the receiver needs to receive announcement information for allows it to save resources, most notably power supply and radio receiver resources. Resource saving can be  
5 optimised if timeout information is also available.

Embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings.

### 10 **Brief Description of the Drawings**

In the drawings:

Figure 1 is a schematic diagram of a broadcast system including components according to various aspects of the invention;

Figure 2 is a schematic diagram of a receiver according to one aspect of the  
15 invention;

Figure 3 is a schematic diagram illustrating operation of the receiver of Figure 2;

Figure 4 is a schematic diagram illustrating a hierarchy of announcements; and

Figures 5A to 5C are schematic diagrams illustrating screen shots produced by a user interface forming part of the Figure 2 receiver according to one aspect of the  
20 invention.

### **Detailed Description of the Embodiments**

Referring to Figure 1, a broadcast system according to an embodiment of the invention is shown, comprising generally a broadcast server apparatus 10, the  
25 internet 11, a DVB-T system 12, a radio transmitter tower 13 and a client receiver terminal 14. The broadcast server 10 includes an information service broadcaster 15, which includes software for generating IP streams and corresponding IP session announcements at plural levels, as SAP messages. The IP streams may be conventional which are not described in further detail here. In another embodiment  
30 of the invention the IP streams may also be so-called IP datacast bursts using time-slicing. According to the invention, though, the IP session announcements are unconventional. When time-slicing is used, the session announcements are substantially similar to the conventional session announcements. Except for the

lowest level IP session announcements, each IP session announcement generated by the information service broadcaster 15 includes information identifying the IP destination address and the port at which location SAP messages announcements on a level below the current level can be found. Typically, this is a level immediately below the current level, but this is not necessary. Also, announcements can be in respect of plural lower levels, which may or may not include the immediately lower level. Each IP session announcement also includes a message identifier hash field of the SAP message, and the category or subcategory to which the information service relates. The message identifier hash fields each include a hash value, which uniquely identifies the message with the originating source address. Each announcement also includes information identifying the number of messages on the lower level and relating to that category, and a timeout value. The timeout value may be set at a value dependent on, for example equal to, the minimum time between updates in the lower level messages. Also included are the starting and stopping times of the sending of the service and the transport format, for example sap sdp. Announcement messages at the lowest level give the transport protocol (e.g. RTP/UDP/IP) and the format of the media.

The IP session announcements may describe the above listed information in any convenient manner. For example, the 'count' and timeout' parameters could be included in the "cat" attribute of an SDP message, e.g. "a=cat:x.y.z 10 20" means pointer to category "x.y.z" with 'count' 10 and 'timeout' 20. Alternatively, this information could be included in an SDP media field "m", e.g. as "m=application 9889 sap sdp 10 20".

25

The IP streams and IP session announcements at all levels generated by the information service broadcaster 15 are provided by the server 10 and via the internet 11 to the DVB-T system 12. Here, the IP streams and IP session announcements are prepared before being broadcast by the radio transmitter tower 13. The terminal receiver 14, which in this example is a terrestrial digital receiver, receives IP session announcements via an antenna 16. The receiver includes a database 17, a receiver device 18, a parser device 19 and a service directory 20, which contains information about the different categories which are shown to a user

and information concerning where announcements relating to the categories can be found.

Operation of the client receiver 14 is as follows. IP session announcements are received, and the category information thereof is examined for announcements relating to a required information service or category. The identity of the information service that is required is entered by a user and stored in the database. When an IP session announcement relating to the required category is found, the information it contains is stored locally. From the stored announcement, the client receiver 14 determines the IP address and port of announcements at a lower level, typically a level immediately below, and directs the receiver 18 to that location. The announcement may contain the IP address and port information, or it may be that information included in the announcement is combined with mapping information to obtain the physical and logical channel (location) required. Receiving SAP messages from that IP address and port, the client receiver 14 receives and stores a number of messages equal to the number given in the IP session announcement of the higher level, typically the level immediately above, after which it starts a timer (not shown) and ceases receiving. Here, only messages related to the required category are stored. Moreover, the hash values from the message identifier hash fields are examined along with the originating source addresses to ensure that each of the different messages is received and stored. If the hash values were not checked, messages could be missed if, for example, the messages are transmitted in a non-repeating sequence. Once the timer reaches a value equal in seconds to the timeout value included in the relevant IP session announcement, the receiver again receives SAP messages from the IP address and port identified in the higher level IP session announcement.

In this way, the receiver 18 is enabled to receive SAP messages for a time sufficient to receive all of the messages that are included thereon, and does not receive any messages again until after a time dependent on the timeout value has lapsed. Thus, the receiver 18 is enabled for receiving announcement messages on that level of hierarchy only intermittently.

Announcements on lower levels which relate to announcements rather than IP streams are handled in a substantially the same manner, although relating instead to messages concerned with a required sub-category, rather than category.

5 An alternative form of client receiver is shown in Figure 2.

Referring to Figure 2, a client receiver, in the form of a handheld terminal 30, is shown, the terminal comprising generally a first antenna 31, a DVB antenna 34, a transceiver 32, a DVB receiver 35 for receiving DVB transmissions, a central  
10 processing unit (CPU) 33 and a power source, preferably in the form of a rechargeable battery. The transceiver 32 is connected to the first antenna 31 and to the CPU 33. The DVB receiver 35 is connected to the DVB antenna 34. Also connected to the CPU 33 are the DVB receiver 35, a keypad 36, a display 37 and an audio output means 38. A user interface is constituted by various parts of the  
15 terminal, particularly the DVB receiver 35, the CPU 33 and the display 37. The terminal 30 also includes other conventional features of mobile telephone handsets, but these are omitted from Figure 2 for the sake of clarity.

The identity of an information service with which a user is interested is entered via  
20 the keypad 36. Of course, entry may be made in any other convenient manner, such as through voice commands or through a touch-screen (not shown). The CPU 33 then controls the transceiver 32 and the DVB receiver 35 to find and to receive IP session announcements corresponding to the required information service. Once announcement information relating to the required category has been received, the  
25 CPU 33 controls the transceiver 32 and the DVB receiver 35 to receive messages on a lower level of announcements.

In some circumstances, the CPU 33 may determine that further user input is required, for example, to select which, if any, of the available subcategories or IP  
30 streams is of interest. Here, the available subcategories or streams are displayed using the display 37 and/or announced using the audio output 38, and a user selection input is awaited. In this case, the CPU 33 exerts control so that the appropriate IP session announcements or IP streams are not received until a user



selection has been made, which results in a saving of battery power. However, the DVB receiver 35 is controlled to continue receiving IP session announcements at the highest level either continuously or intermittently, in case there is a change in that information service. The number of announcement messages available is  
5 determined by the DVB receiver 35 by examining the information identifying the number of messages on the channel. Any change is reflected in the displayed and/or announced options.

An example of the way in which the receiver 14 and the terminal 30 may operate in  
10 response to received IP session announcements is described with reference to Figure 3. The Figure 2 receiver is referred to for ease of explanation.

Referring to Figure 3, the terminal 30 starts at A by controlling its DVB receiver 35 to receive a root level message RM, i.e. a highest level IP session announcement,  
15 corresponding to the required category. The message RM includes all the information about the announcements on a lower level, typically the level immediately below the root level, as described above with reference to Figure 1. From the root message RM, the terminal 30 determines at step B that its DVB receiver 35 should receive announcement messages from channel X having a now  
20 known IP address and port, and controls the transceiver 32, as well as the receiver, accordingly. The terminal 30 also knows from the root message RM that there are three different messages on the channel X and that the timeout value is fifteen seconds. At step C, the DVB receiver 35 then receives three announcement  
25 messages, in the form of messages X1, X2 and X3, before ceasing receiving messages. It will be understood that channel X may be on the same or a different physical channel to that on which the root message RM is transmitted, and that it may be a different multicast group.

After ceasing receiving, the DVB receiver 35 may at step D and during its timeout  
30 period, listen to messages on another channel Y, which carries announcement messages concerning one or more of the subcategories to which the messages on channel X relate. Alternatively, the DVB receiver 35 may sleep at step E before again receiving the messages on channel X at step F. To ensure full integrity of the

received messages, the DVB receiver 35 may perform recursive rescan at the end of the timeout period of step E.

In other embodiments (not shown), the quantity of data included on the IP session announcements on a level immediately below a current level is defined in the IP  
5 session announcements on the higher level in terms other than by the number of messages, for example in terms of the duration of the data transmission or in terms of the quantity (in bytes) of data.

10 Other forms of terminal 30 are possible. With the example given, the terminal 30 may be any one with DVB baseband capability, such as a suitably equipped laptop computer. Where a network other than DVB-T is used, the terminal 30 may take any suitable form, such as a personal digital assistant (PDA), or a portable sound reproduction device, such as a personal stereo. Alternatively, the receiver could be  
15 a wireless local area network (WLAN) module.

In alternative embodiments, the announcements may be sent with UHTTP, instead of with SAP, with attachment/content of MMS or e-mail, or with HTTP response. UHTTP has the advantage that it can include many SDP messages. Also, XML,  
20 RDF or any other suitable structured language could be used in place of SDP.

Referring now to Figure 4, an example of a hierarchy tree is shown. Here, a first (highest) level (DCO) is shown, with three categories (news, sport and entertainment) on a second level, which is lower than the first. Each of the  
25 categories on the second level includes various subcategories (on a third level), although only the subcategories of the sport category are shown, namely football, basketball and athletics. As can be seen, the football subcategory has two sessions associated with it, namely games and football news. Sessions are of the lowest level of the hierarchy. Operation of the user interface of the receiver of Figure 2 will  
30 now be described with reference to Figures 4 and 5.

Referring firstly to Figure 5A, the DVB receiver 35, forming part of the user interface, receives an announcement message, transmitted in respect of the first

level, identifying there to be three messages at the second level. These three messages relate to the same category, which in this case is 'information'. The first level announcement message received by the user interface also includes certain other information relating to them as is described above in relation to the earlier  
5 Figures. The DVB receiver 35 then receives the three messages, as described above, and from the received messages obtains a title or label for each of them. The user interface in response displays a screenshot 50, which includes a number of options equal to the number of messages at the second level, and identifies each of them with its respective title or label.

10

In connection with the selection of the 'sports' option by a user, the user interface receives the three announcement messages which relates to the announcements in the category 'sports' and existing at the third level. These messages include information labels identifying the titles or labels of those three options, as well as  
15 the port and address where those messages can be received. Labels identifying those subcategories are then displayed as is shown by the screen shot 51 of Figure 5B.

20

In connection with the selection of the 'football' option by a user, the user interface receives two session messages relating to that option, and information therefrom is displayed at the screen shot 52 of Figure 5C. In this example, the screen shot 52 indicates that clips from the game that morning will be broadcast between 15:00 and 16:00. Optionally, the user interface may display other information also received as part of the announcement messages, such as further description of the broadcast,  
25 and/or the URL of a website where more information can be found.

In the foregoing, it will be appreciated that the terms 'higher level' and 'lower level' refer to announcements and the like which are connected with levels further up or down, respectively, the hierarchical structure.

30

## Claims

1. A method of operating broadcast or multicast apparatus, the method comprising:
  - 5 controlling the apparatus to broadcast or multicast, in respect of one or more announcements on a lower level and relating to a category of an information service, data indicating a category to which the announcements relate, and data indicating the quantity of announcement information transmitted in respect of the lower level.
- 10 2. A method as claimed in claim 1, in which the data is broadcast or multicast in respect of one or more announcements on an immediately lower level.
3. A method as claimed in claim 1 or claim 2, further comprising controlling
  - 15 the apparatus to broadcast or multicast information identifying a location of access of the lower level announcement information.
4. A method as claimed in any preceding claim, further comprising controlling the apparatus to broadcast or multicast information identifying a timeout value.
- 20 5. A method as claimed in any preceding claim, further comprising controlling the apparatus to broadcast or multicast information identifying a transport format of the lower level announcements.
- 25 6. A method as claimed in any preceding claim, wherein the broadcast or multicast is an Internet Protocol datacast transmission using time-slicing.
7. An information service broadcaster or multicaster arranged to produce for broadcasting or multicasting data indicating a category to which one or more
  - 30 announcements on a lower level and relating to information service belong and data indicating the quantity of announcement information transmitted in respect of the lower level announcements.

8. An information service broadcaster or multicaster as claimed in claim 7, in which the announcement data relates to one or more announcements on an immediately lower level.

5 9. A method of operating a receiver, the method comprising:  
receiving via a receiver announcement data indicating a category to which one or more announcements on a lower level and relating to an information service belong, and quantity data indicating the quantity of announcement information transmitted in respect of the lower level announcements; and  
10 controlling the receiver to receive announcement data for a period of time dependent at least in part on the quantity data.

10. A method as claimed in claim 9, in which the announcement data relates to one or more announcements on an immediately lower level.

15 11. A method as claimed in claim 9 or claim 10 in which the controlling step includes directing the receiver to a location received as part of a relevant higher level announcement.

20 12. A method as claimed in any of claims 9 to 11, further comprising receiving in connection with the higher level announcement information indicating a timeout value, and controlling the receiver to cease receiving announcement data for a period of time dependent the timeout value, and to subsequently resume receiving announcement data.

25 13. A receiver for receiving announcement data indicating a category to which one or more announcements on a lower layer and relating to an information service belong and quantity data indicating the quantity of announcement information transmitted in respect of the lower level announcements; and arranged to receive  
30 announcement data for a period of time dependent at least in part on the quantity data.

14. A receiver as claimed in claim 13, in which the announcement data relates to one or more announcements on an immediately lower level.

15. A receiver as claimed in claim 13 or claim 14 which is arranged to be  
5 directed to a location identified by location information data receivable as part of the higher level announcement.

16. A receiver as claimed in any of claims 13 to 15, which is arranged to cease  
10 receiving lower level announcement data for a period of time dependent on a timeout value receivable by the receiver, and to resume subsequently receiving information service data.

17. A receiver as claimed in any of claims 13 to 16, which is a portable, battery-  
15 powered receiver.

18. A receiver as claimed in any of claims 13 to 17, which is arranged to receive  
time-sliced Internet Protocol datacast transmissions.

19. A user interface, useable with an electronic program or service guide, the  
20 user interface comprising:



a receiver module arranged to receive data indicating a category to which one or more announcements on a lower level and relating to an information service belong, and quantity data indicating the quantity of announcement information transmitted in respect of the lower level announcements, and

25 a display module arranged to display a number of category options, which options are selectable by a user, the number of category options being dependent at least in part on the quantity data.

20. A broadcast or multicast system substantially as shown in and/or as  
30 described with reference to Figure 1 of the accompanying drawings.

21. A receiver substantially as shown in and/or as described with reference to Figure 2 of the accompanying drawings.

22. A method of operating a receiver substantially as herein described with reference to Figures 2 and 3 of the accompanying drawings.

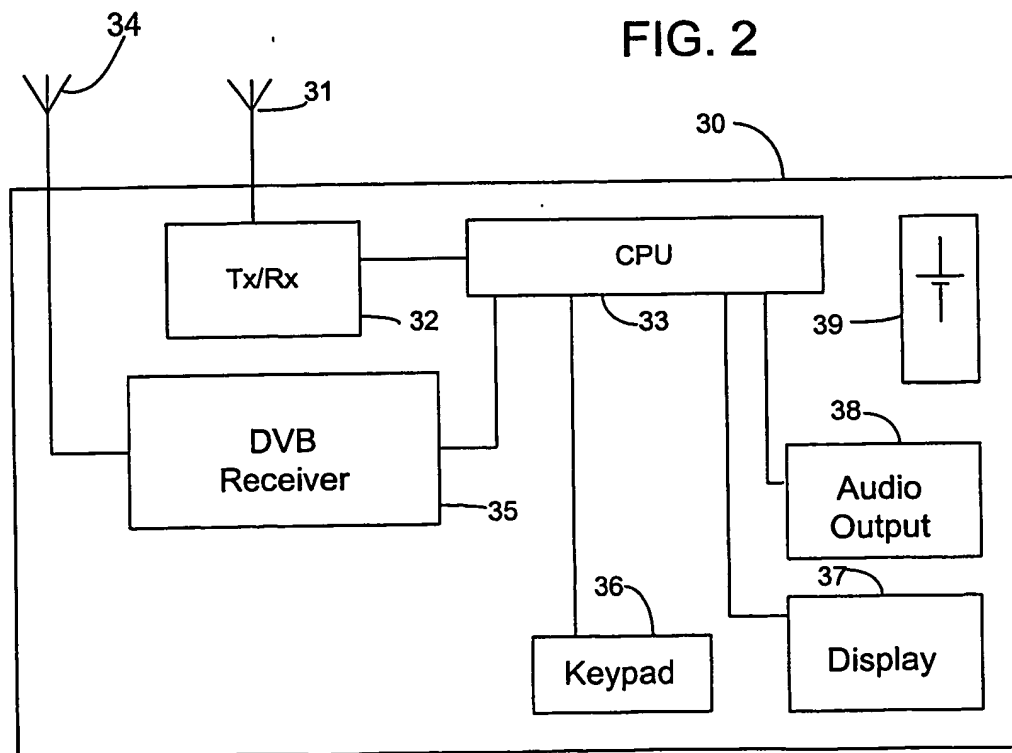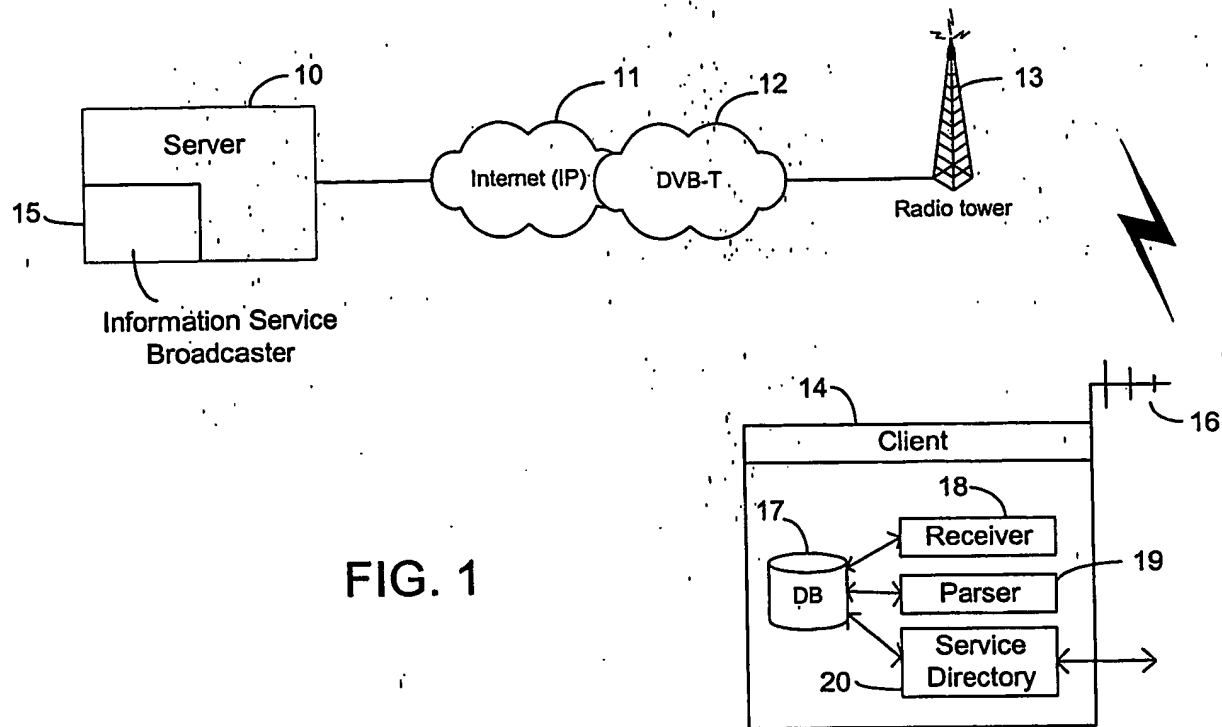



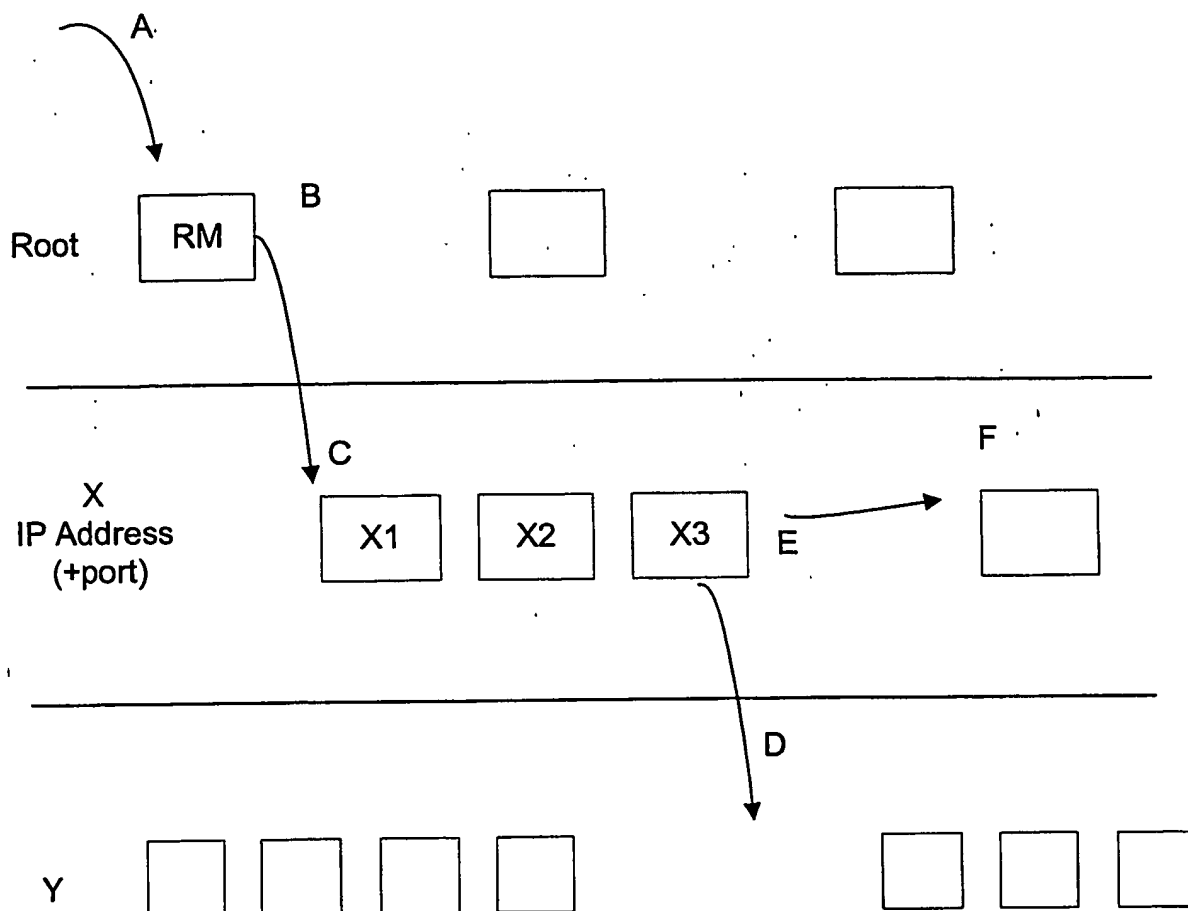


FIG. 3

3/3

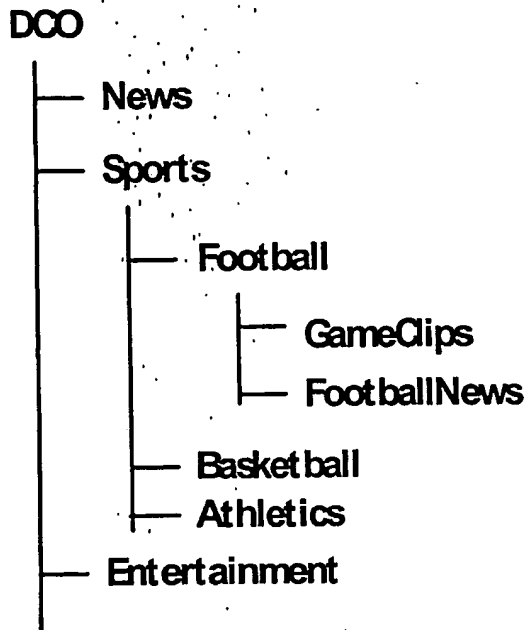


FIG. 4



FIG. 5A

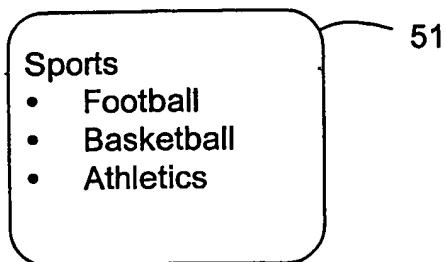


FIG. 5B

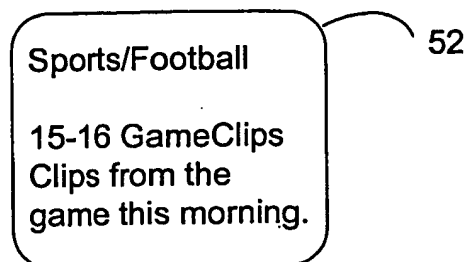


FIG. 5C

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 03/03016

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04L 12/18, H04N 7/15

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04L, H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 0199348 A1 (BRITISH TELECOMMUNICATIONS PLC), 27 December 2001 (27.12.01), page 3, line 20 - page 4, line 16; page 20, line 6 - line 30; page 25, line 29 - page 26, line 6  --	1-19
X	WO 0036804 A1 (BRITISH TELECOMMUNICATIONS PLC), 22 June 2000 (22.06.00), page 4, line 20 - page 5, line 3, abstract  --	1-19

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

- |   |  |
|---|--|
| * Special categories of cited documents:  | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  |
| "A" document defining the general state of the art which is not considered to be of particular relevance  | "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone   |
| "E" earlier application or patent but published on or after the international filing date   | "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | "&" document member of the same patent family  |
| "O" document referring to an oral disclosure, use, exhibition or other means  |  |
| "P" document published prior to the international filing date but later than the priority date claimed  |  |

Date of the actual completion of the international search  19 Sept 2003	Date of mailing of the international search report  23 -09- 2003
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer  Kristoffer Ogebjer /LR Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 03/03016

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FINLAYSON, R.: Describing session directories in SDP. <draft-ietf-mmusic-sdp-directory-type-01.txt> 2000-06-21. Retrieved on 2003-09-17 from the Internet: <a href="http://www.ietf.org/proceedings/00dec/I-D/draft-ietf-mmusic-sdp-directory-type-01.txt">http://www.ietf.org/proceedings/00dec/I-D/draft-ietf-mmusic-sdp-directory-type-01.txt</a> See chapter 3  --	1-19
A	US 5497186 A (KAWASAKI, M.), 5 March 1996 (05.03.96), column 3, line 4 - line 28, abstract  --	1-19
A	EP 0957598 A2 (MATSUSHITA ELECTRIC IND CO, LTD), 17 November 1999 (17.11.99), claims 1-49  --	1-19
A	EP 0325325 A2 (PHILIPS AND DU PONT OPTICAL CO), 26 July 1989 (26.07.89), abstract  -- -----	1-19

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/IB03/03016

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: **20-22**  
because they relate to subject matter not required to be searched by this Authority, namely:  
**Claims shall not rely on references to the description or drawings according to PCT Rule 6.2(a).**
2. ☐ Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.  
☐ No protest accompanied the payment of additional search fees.

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

26/07/03

International application No.

PCT/IB 03/03016

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	0199348	A1	27/12/01	AU	7424401 A	02/01/02
				CA	2409211 A	27/12/01
				EP	1290825 A	12/03/03
				GB	0014662 D	00/00/00
WO	0036804	A1	22/06/00	AU	1286700 A	19/06/00
				AU	1395900 A	03/07/00
				CA	2352207 A	22/06/00
				CA	2352210 A	08/06/00
				EP	1133861 A	19/09/01
				EP	1142267 A	10/10/01
				GB	9826158 D	00/00/00
				JP	2002532012 T	24/09/02
				JP	2002533023 T	02/10/02
				WO	0033535 A	08/06/00
US	5497186	A	05/03/96	JP	2829159 B	25/11/98
				JP	5075999 A	26/03/93
EP	0957598	A2	17/11/99	AU	761964 B	12/06/03
				AU	2600999 A	18/11/99
				CN	1239855 A	29/12/99
				JP	3302940 B	15/07/02
				JP	2000036796 A	02/02/00
				SG	81981 A	24/07/01
				TW	417393 B	00/00/00
EP	0325325	A2	26/07/89	SE	0325325 T3	
				AT	142391 T	15/09/96
				AU	639411 B	29/07/93
				AU	2855789 A	20/07/89
				BR	8900237 A	12/09/89
				CA	1322593 A,C	28/09/93
				CN	1023265 B	22/12/93
				CN	1025701 B	17/08/94
				CN	1035577 A	13/09/89
				CN	1068673 A	03/02/93
				CZ	284768 B	17/02/99
				CZ	8900287 A	16/12/98
				DE	3801332 A	27/07/89
				DE	68927063 D,T	18/09/97
				HK	1007226 A	00/00/00
				JP	2007276 A	11/01/90
				JP	3092924 B	25/09/00
				JP	2000331437 A	30/11/00
				KR	138112 B	15/05/98
				SK	28789 A	12/06/00
				SK	280685 B	12/06/00
				US	5587979 A	24/12/96
				DE	3816832 A,C	30/11/89